



Keychron

Q1 HE Wireless Magnetic Switch Keyboard

Knob
Version

Fully Assembled Version

Keyboard

1x Fully Assembled Keyboard

Including

1x Aluminum Case

1x PCB

1x Aluminum Plate

1x Sound Absorbing Foam

1x Latex Bottom Pad

1x Bottom Case Acoustic Foam


1x Bottom Case PET Film

14x Gaskets (10 Installed and 4 in the Box)

4 sets x Stabilizers

1 set x Keycaps (PBT Double-shot)

1 set x Magnetic Switches

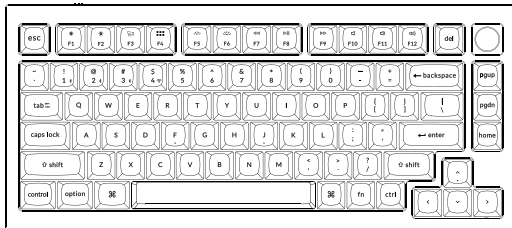

Cable

1x Type-C to Type-C Cable

1x Type-A to Type-C Adapter

1x Extension Adapter for Receiver

Receiver


1x Type-A 2.4 GHz Receiver

Tools

1x Keycap & Switch Puller

1x Screwdriver

1x Hex Key

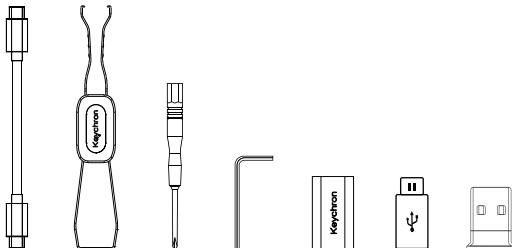

Barebone Version

Keyboard Kit

1x Keyboard Kit (Without Keycaps & Switches)

Including

1x Aluminum Case

1x PCB

1x Aluminum Plate

1x Sound Absorbing Foam


1x Latex Bottom Pad

1x Bottom Case Acoustic Foam

1x Bottom Case PET Film

14x Gaskets (10 Installed and 4 in the Box)

4 sets x Stabilizers

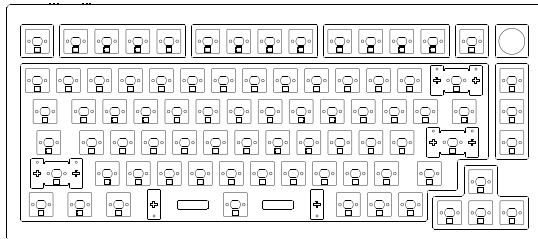

Cable

1x Type-C to Type-C Cable

1x Type-A to Type-C Adapter

1x Extension Adapter for Receiver

Receiver


1x Type-A 2.4 GHz Receiver

Tools

1x Keycap & Switch Puller

1x Screwdriver


1x Hex Key

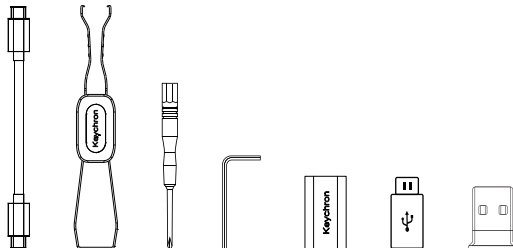

Quick Start Guide

If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.

Mac / Windows

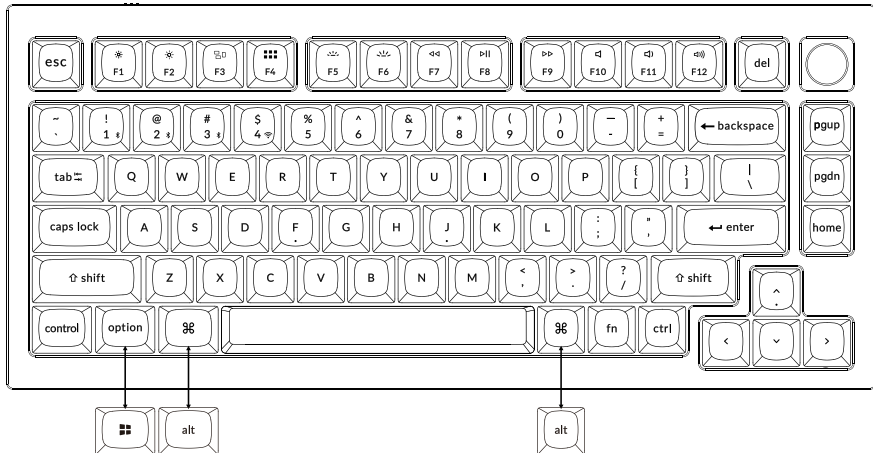


1 Connect 2.4 GHz Receiver



Connect the 2.4 GHz receiver to the device USB port.



Switch toggle to 2.4 GHz mode




G = 2.4 GHz




Note: For the best wireless experience, we recommend using the extension adapter for receiver and putting the 2.4 GHz receiver somewhere on your desk close to your keyboard for a low rate of latency and fewer signal interferences.


2 Connect Bluetooth




Switch toggle to Bluetooth



Press fn + 1 (for 4 seconds) and pair with device named Keychron Q1 HE




3 Connect Cable

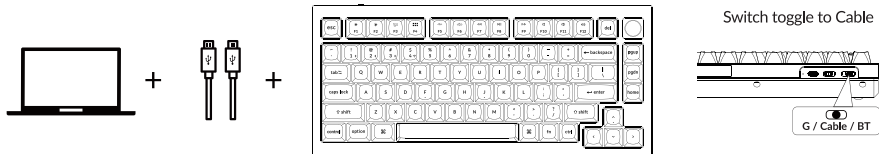

4 Switch To The Right System

Please make sure the system toggle on the top left corner has been switched to the same system as your computer's operating system.



5 The Keychron Launcher App

Please visit launcher.keychron.com to access the Keychron online launcher app. This app enables users to remap keys, adjust key actuation points, assign multiple commands to a single key, enter game controller mode, and more.

If it cannot recognize your keyboard, please reach our support to get instruction.



*The online launcher App can only run on the latest version of Chrome, Edge, and Opera browsers yet.



*The online launcher App only works when the keyboard is connected by wire to the computer.

6 The Layers

There are four layers of key settings on the keyboard. The layer 0 and layer 1 are for the Mac system. The layer 2 and layer 3 are for the Windows system.


If your system toggle is switched to Mac, then the layer 0 will be activated.

If your system toggle is switched to Windows, then the layer 2 will be activated. Remember that if you are using it in Windows mode, please make changes to the layer 2 instead of the top layer (the layer 0). This is a common mistake people are making.




7 The Backlight

Press fn + Q to change the lighting effect



fn + Q


Press fn + tab to turn the backlight on/off



fn + tab


8 Adjust The Backlight Brightness

Press fn + W to increase the backlight brightness



fn + W


Press fn + S to decrease the backlight brightness




fn + S

9 Adjust The Backlight Speed

Press fn + T to increase the light effect speed



Press fn + G to decrease the light effect speed




10 Warranty

The keyboard is highly customizable and easy to be rebuilt. If anything goes wrong with any of the keyboard components of keyboard during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.



11 Factory Reset



Troubleshooting? Don't know what's going on with the keyboard?

1. Download the right firmware and QMK Toolbox from our website.
2. Unplug the power cable and switch the keyboard to Cable mode.
3. Remove the space bar keycap to find the reset button on the PCB.
4. Hold the reset key first, then plug the power cable into the keyboard.
Release the reset key after 2 seconds, and the keyboard will now enter DFU mode.
5. Flash the firmware with the QMK Toolbox.
6. Factory reset the keyboard by pressing fn + J + Z (for 4 seconds).

*Step by step guide can be found on our website.

Q1 HE WIRELESS MAGNETIC SWITCH KEYBOARD SPECIFICATIONS

Number of keys: 81

Switch type: Magnetic

Battery: 4000mAh

Charging time: Around 5 hours

Charging port: USB Type-C

Mode: 2.4 GHz/ Cable / Bluetooth




Wireless operating distance: Within 10 meters (open space)

Name of Bluetooth device: Keychron Q1 HE

Operating environment: -10 to 50°C

Technical specifications can be subjected to change without notice, we apologize for any inconvenience caused.


Q1 HEWIRELESS MAGNETIC SWITCH KEYBOARD OVERVIEW

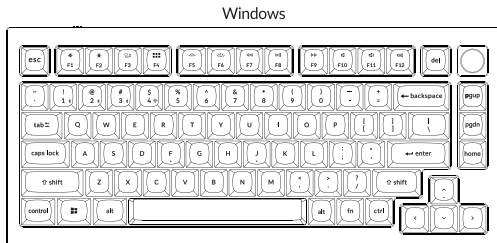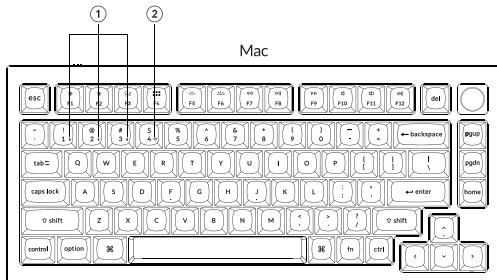


- ① Bluetooth Indicator
- ② 2.4 GHz Indicator
- ③ G Cable BT (Mode Toggle)
- ④ Win/Android Mac/iOS (OS Toggle)
- ⑤ Type-C Port
- ⑥ Power Indicator

DEFAULT KEY LAYOUT:


LAYER 0: This layer will be activated when your keyboard's system toggle is switched to Mac.

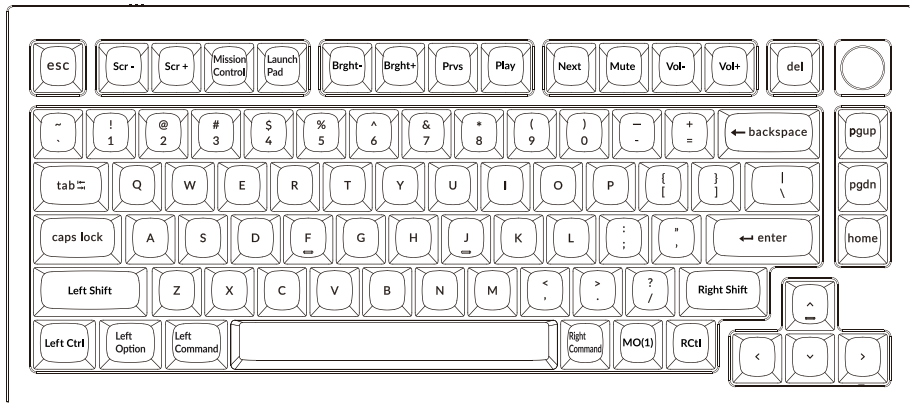

Layer 1: This layer will be activated when your keyboard's system toggle is switched to Mac and press the fn/MO(1) key.

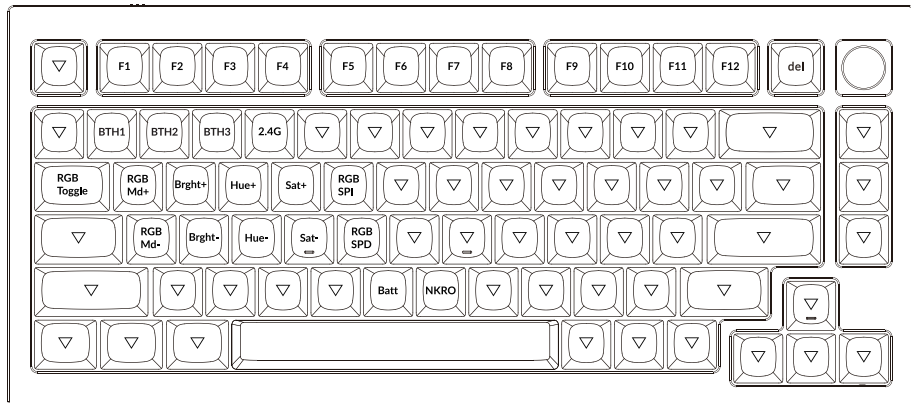


LAYER 2: This layer will be activated when your keyboard's system toggle is switched to Windows.

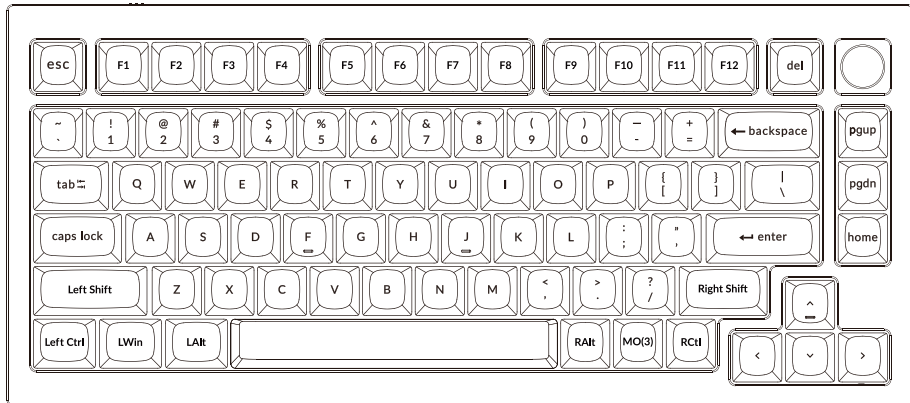

LWin = Left Windows LAlt = Left Alt RAlt = Right Alt RCtrl = Right Ctrl

LAYER 3: This layer will be activated when your keyboard's system toggle is switched to Windows and press the fn/MO(3) key.

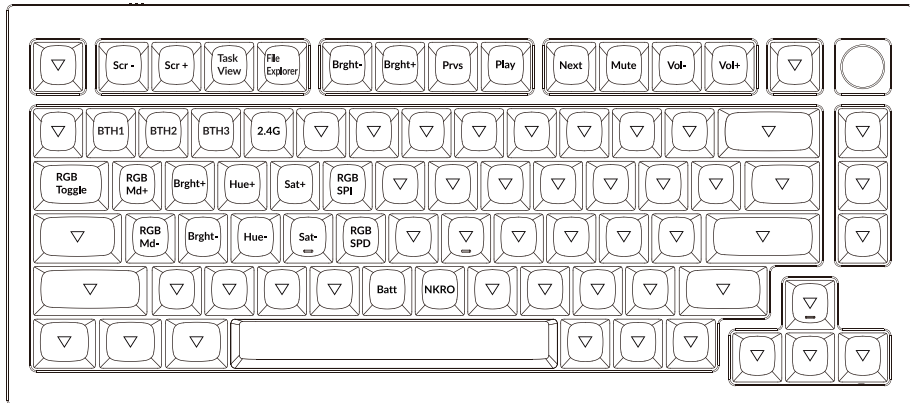

KEY DESCRIPTION

| Key Description | | Key Description | | Key Description | |
|-----------------|----------------------------|-----------------|-------------------------------------------------|-----------------|---------------------|
| Scr- | Screen Brightness Decrease | RGBMd- | RGB Mode Previous | Sat+ | Saturation Increase |
| Scr+ | Screen Brightness Increase | Hue+ | Hue Increase | Sat- | Saturation Decrease |
| Bright- | Backlight Decrease | Hue- | Hue Decrease | 2.4G | 2.4 GHz Host |
| Bright+ | Backlight Increase | RGB SPI | RGB Speed Increase | Batt | Battery life |
| Prvs | Previous | RGB SPD | RGB Speed Decrease | NKRO | N-key rollover |
| Play | Play/Pause | MO(1) | Layer 1 will be activated when holding this key | | |
| Next | Next | MO(2) | Layer 2 will be activated when holding this key | | |
| Mute | Mute | MO(3) | Layer 3 will be activated when holding this key | | |
| Vol- | Volume Decrease | MO(4) | Layer 4 will be activated when holding this key | | |
| Vol+ | Volume Increase | BTH1 | Bluetooth Host 1 | | |
| RGB Toggle | Turn Backlight on/off | BTH2 | Bluetooth Host 2 | | |
| RGBMd+ | RGB Mode Next | BTH3 | Bluetooth Host 3 | | |

LED STATUS OVERVIEW

| LED Location | Function | Status |
|-------------------------------|---------------------|-------------------------------------------------------------------------------|
| Power Indicator | Charging | Charging - Static Red Fully charged - Static Green |
| Bluetooth / 2.4 GHz Indicator | Bluetooth / 2.4 GHz | Reconnecting - Fast Blinking Paired - Light off Pairing - Slow Blinking |
| Caps Lock Indicator | Caps Lock | Enable Caps Lock - Static White Disable Caps Lock - Light Off |

FUNCTION DESCRIPTION: CHARGING

Plug the cable into a USB port and plug the other end into the keyboard port. Power Indicator: A red light will stay on while charging; Fully charged in around 5 hours, a green battery indicator will appear.

*The Keychron keyboard is compatible with all USB ports. Please use a 5V 1A adapter or USB 3.0 for the best performance. The Keychron Q1 HE can be charged in 2.4 GHz/Cable/Bluetooth mode.

**This product supports up to 5V charging voltage and 1A charging current. We are not responsible for any problems caused by improper charging.

2.4 GHZ / BLUETOOTH / WIRED MODE (MODE TOGGL)

2.4 GHZ WIRED MODE

1. Connect the 2.4 GHz receiver to your device's USB Port.
2. Switch the toggle to the 2.4 GHz option. The keyboard will automatically connect to your device.

*Press the key combination "fn" + "4" to enter the forced pairing mode. During this period, it is recommended that the keyboard be within 20cm of the receiver.

WIRED MODE

1. Switch the toggle to the Cable option (it only works when a USB cable is plugged in).
2. Connect our cable with your PC and keyboard.
3. Backlighting will be turned on.

*Under Wired Mode, keyboard will not enter into Battery Saver Mode.

BLUETOOTH MODE

1. Switch the toggle switch to the Bluetooth option.
2. Backlighting will be turned on.
3. Hold "fn+1" key for 4 seconds to activate Bluetooth pairing (the Bluetooth indicator fast flashes for 3 minutes to detect pairing).
4. Search for the Bluetooth device "Keychron Q1 HE" on your device and connect it (the Bluetooth indicator goes off after successful pairing).

Note: This keyboard supports pairing up to 3 devices simultaneously via key combination "fn" + "1" / "fn" + "2" / "fn" + "3".

**The Bluetooth indicator will continue to flash for 3 minutes.*

***Slow or failed connections may exist due to different Bluetooth versions, please make sure all the settings are correct.*

SWITCH BLUETOOTH DEVICES

Short press key combination “fn” + “1” / “fn” + “2” / “fn” + “3” to switch to other device.

RECONNECT:

1. Switch the keyboard to the Bluetooth option to activate the keyboard.
2. The Bluetooth indicator flashes for 4 seconds and automatically pairs with the last paired device.
3. If the Bluetooth indicator is off, press any button to enter the connection again.

*The keyboard must have been paired with the device to perform this function.

TURN OFF THE KEYBOARD

Switch the keyboard to the Cable option and unplug the power cable.

BACKLIGHT SETTING

- Short press key combination “fn” + “tab” or “fn” + “knob (press)” to turn the backlight on/off.
- Short press key combination “fn” + “Q” / “fn” + “A” to switch between different types of lighting effects.

AUTO SLEEP MODE:

When the keyboard is in Bluetooth or 2.4G wireless mode, it will enter AUTO SLEEP MODE when there are no key operations to save power.

1. After 10 minutes of inactivity, the keyboard backlight turns off. Press any key to wake up the keyboard;
2. After 30 minutes of inactivity, the keyboard will enter deep sleep mode and disconnect the wireless connection. Press the SPACE BAR to wake up the keyboard. The keyboard backlight turns on and automatically connects back to your device.

OS TOGGLE

1 – MAC/iOS

Switch the toggle to Mac/iOS when the keyboard is connected to a Mac or iOS operating system.

2 – WINDOWS/ANDROID

Switch the toggle to Windows/Android when the keyboard is connected to a Windows or Android operating system.

**When using the Windows/Android mode,   keys are used for “Windows” and “Alt” functions.*

TROUBLESHOOTING

If unable to pair keyboard to device, confirm that the device you’re trying to pair with is Bluetooth-capable. If so, restart the device and try pairing it with the keyboard again.

Note: On a Windows computer, a new Bluetooth connection will sometimes require additional software updates—a process that may still be ongoing after a message appears indicating a successful completion. Wait at least 20 minutes after pairing to make sure all updates are completed before restarting the computer.

Confirm that the device is configured to accept Bluetooth connections (Windows) and supports an external keyboard (HID profile).

Go to Bluetooth Devices > Open Settings and select the following:

Allow Bluetooth devices to find this computer

Allow Bluetooth devices to connect to this computer

Alert me when a Bluetooth device wants to connect

Safety Precaution:

Keep the product, accessories and packaging parts out of the reach of children to prevent any accidents and choking hazards.

Always keep the product dry to avoid corrosion.

Do not expose the product to extreme temperatures below -10°C (14°F) or above 50°C (122°F) to preserve the lifespan of the keyboard.

Keychron, Inc.

Dover, DE 19901, United States

Find us at:

<https://www.keychron.com>

Support@keychron.com

 @keychron

 @keychron

 @keychronMK

Designed by Keychron

Made in China

 Keychron

Q1 HE 无线磁轴键盘

旋钮版本

完全组装版本

键盘

1x 已组装成品键盘

包含

1x 铝合金金属外壳

1x PCB

1x 铝定位板

1x PCB与定位板夹心吸音泡棉

1x 乳胶底垫

1x 底壳吸音泡棉


1x 底壳PET垫

14x Gaskets缓冲垫 (10个缓冲垫已安装在键盘本体、4个放置在包装内部)

4套PCB卫星轴

1套键帽 (PBT材质-双色注塑)

1套磁轴体

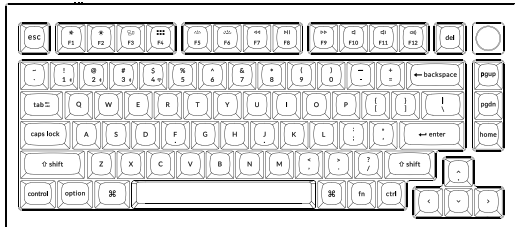

线材

1x Type-C to Type-C 接口线材

1x Type-A to Type-C 转接头

1x 接收器延长器

接收器


1x Type-A 2.4 GHz 接收器

工具

1x 拔轴键器

1x 十字螺丝刀

1x 内六角螺丝刀

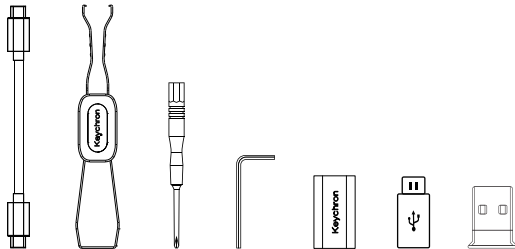

套件版本

键盘

1x 键盘本体 (不包含键帽、轴体)

包含

1x 铝合金金属外壳

1x PCB

1x 铝定位板

1x PCB与定位板夹心吸音泡棉


1x 乳胶底垫

1x 底壳吸音泡棉

1x 底壳PET垫

14x Gaskets缓冲垫 (10个缓冲垫已安装在键盘本体、4个放置在包装内部)

4套PCB卫星轴

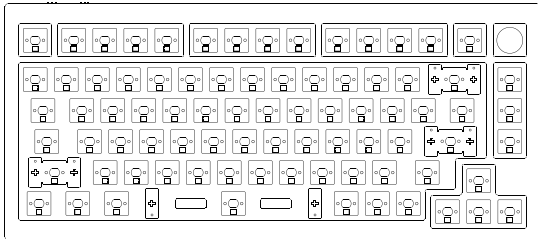

线材

1x Type-C to Type-C 接口线材

1x Type-A to Type-C 转接头

1x 接收器延长器

接收器


1x Type-A 2.4 GHz 接收器

工具

1x 拔轴键器

1x 十字螺丝刀


1x 内六角螺丝刀

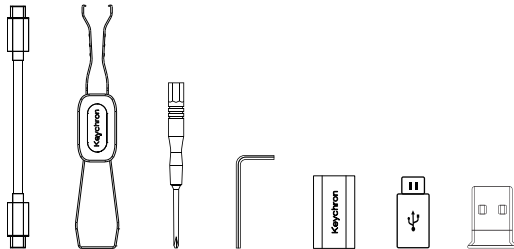


快速上手指南

如果你是Windows用户,请在包装盒里找到如下的键帽,用拔键器拔下键盘上的对应键帽并且更换。

Mac / Windows

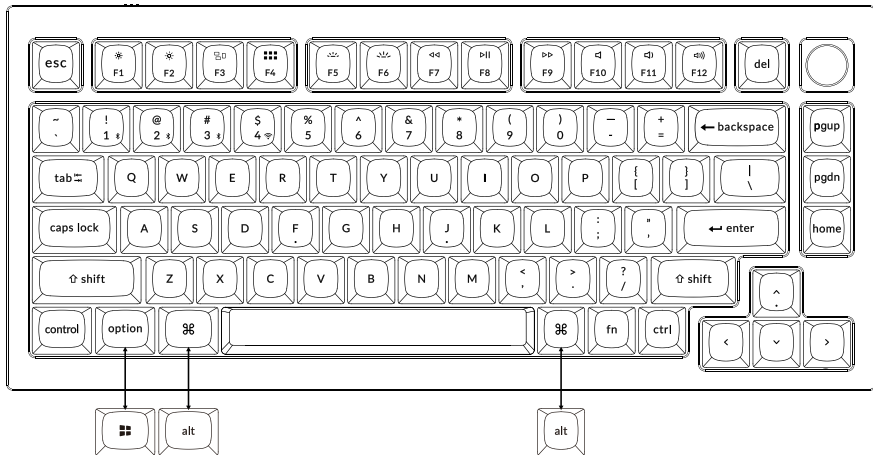


3 连接有线

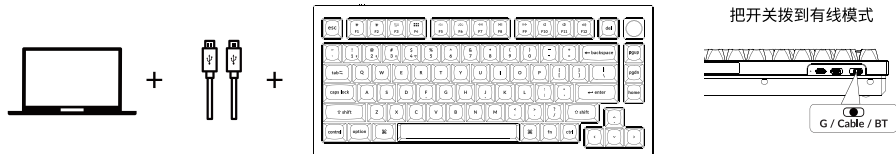

4 系统切换

请确保键盘左上角的系统拨片切换到对应系统，如果没有选择正确，部分功能将无法使用。



5 关于Keychron Launcher App


请访问launcher.keychron.com 使用在线Launcher App。
该软件可以映射按键, 调节按键触发点, 设置一键多重命令,
体验游戏手柄模式等功能。
如果Launcher App不能识别你的键盘,
请联系我们以获得技术支持。




*在线Launcher App只能在最新版本的Chrome, Edge和Opera浏览器中运行。
*Launcher App仅在键盘通过线连接到计算机时有效。

6 关于键盘键层说明

键盘有四层按键设置。
层0和层1是用于Mac系统。
层2和层3是用于Windows系统。



如果您的系统拨片切换到Mac档位,
层0将被激活。




如果您的系统拨片切换到Windows,
那么层2将被激活。
如果您在Windows系统模式下使用,
请对层2进行更改, 而不是层0。
否则无法进行按键映射操作。




7 更改键盘背光模式以及快速关闭/开启键盘背光

组合fn+Q键,更改键盘背光模式。




组合fn+tab键,可快速关闭/开启键盘背光。




8 调整键盘背光亮度

组合fn+W键,提高键盘背光亮度。




组合fn+S键,减少键盘背光亮度。




9 调整背光速度

组合fn+T键, 增加光效速度。



组合fn+G键, 降低光效速度。




10 保修

由于Q1 HE客制化键盘是可高度定制且易于组装的, 所以键盘的任何一个部件出了问题, 我们只会更换键盘有问题的部件而不是整个键盘。



11 恢复出厂模式






如果键盘出现了故障，不知道怎么办？

1. 从我们的网站为您的键盘下载正确的固件和QMK Toolbox；
2. 拔掉数据线，并将键盘拨动到Cable模式。
3. 拔掉空格键键帽，然后找到位于PCB上面的复位按钮；
4. 首先长按住复位键，然后将数据线插入键盘。
2秒后放开这个复位键，此时键盘会进入DFU模式；
5. 然后您可以使用QMK工具箱进行刷新固件的操作；
6. 烧录完成后，长按fn+J+Z将键盘恢复出厂设置。

*步骤指南可以在我们的网站上找到。

Q1 HE 键盘概述

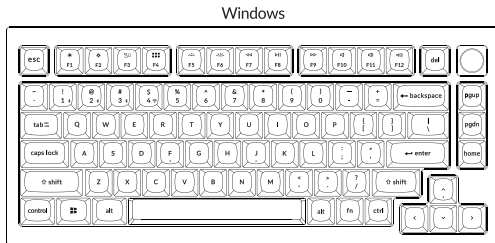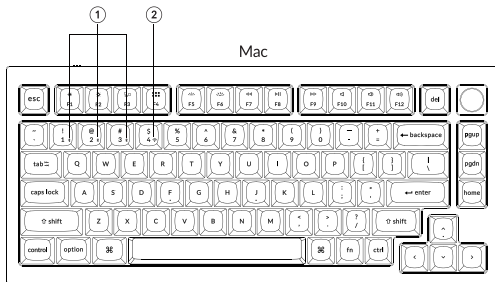

- ① 蓝牙指示灯
- ② 2.4 GHz指示灯
- ③ G Cable BT (连接模式切换开关)
- ④ Win/Android Mac/iOS (OS切换开关)
- ⑤ Type-C 充电口
- ⑥ 电源指示灯

Q1 HE 键盘规格

按键: 81键

轴: 磁轴

电池: 4000mAh

充电时间: 5小时

充电端口: USB Type-C

模式: 2.4 GHz / 有线 / 蓝牙

无线工作距离: 最长10米(开放空间)

蓝牙设备名称: Keychron Q1 HE


功能说明

LED状态显示如下:


| 功能 | LED位置 | 状态 |
|--------------|-------------------|---------------------------|
| 充电 | 电源指示灯 | 充电—红灯常亮 满电—绿灯常亮 |
| 蓝牙 / 2.4 GHz | 蓝牙 / 2.4 GHz通道指示灯 | 快闪—回连 熄灭—连接成功 慢闪—配对 |
| 大小写 | 大小写状态指示灯 | 白灯—大写 熄灭—小写 |

按键布局


层0: 当您的系统拨片切换到Mac档位的时候,层0将被激活使用。

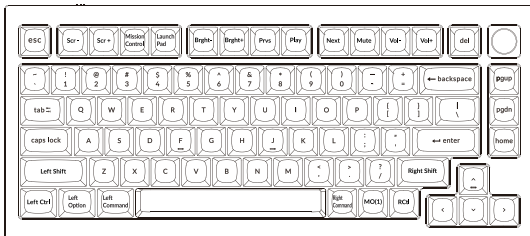

层1: 当您的系统拨片切到Mac档位并组合fn/MO(1)键的时候,层1将被激活使用。

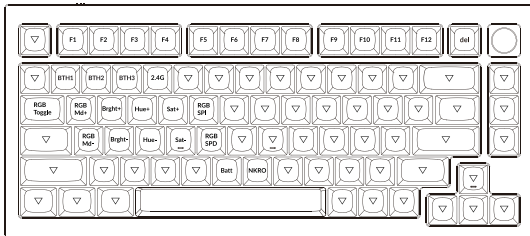


层2:当您的系统拨片切到Windows档位的时候,层2将被激活使用。

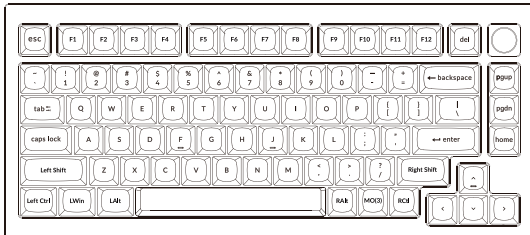

LWin = Left Windows LAlt = Left Alt RAlt = Right Alt RCtl = Right Ctrl

层3:当您的系统拨片切到Windows档位并组合fn/MO(3)键的时候,层3将被激活使用。

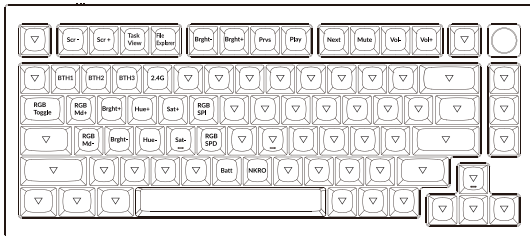

Q1 HE 客制化磁轴键盘多媒体按键说明

| 按键说明 | |
|------------|------------|
| Scr- | 屏幕亮度- |
| Scr+ | 屏幕亮度+ |
| Bright- | 键盘背光亮度- |
| Bright+ | 键盘背光亮度+ |
| Prvs | 上一曲 |
| Play | 播放/暂停 |
| Next | 下一曲 |
| Mute | 静音 |
| Vol- | 音量- |
| Vol+ | 音量+ |
| RGB Toggle | 关闭/开启键盘背光 |
| RGBMD+ | 下一个RGB灯光模式 |

| 按键说明 | |
|---------|----------------|
| RGBMD- | 上一个RGB灯光模式 |
| Hue+ | 下一个灯光颜色 |
| Hue- | 上一个灯光颜色 |
| RGB SPI | RGB灯光速度+ |
| RGB SPD | RGB灯光速度- |
| MO(1) | 按住MO(1),层1将被激活 |
| MO(2) | 按住MO(2),层2将被激活 |
| MO(3) | 按住MO(3),层3将被激活 |
| MO(4) | 按住MO(4),层4将被激活 |
| BTH1 | 蓝牙连接设备 1 |
| BTH2 | 蓝牙连接设备 2 |
| BTH3 | 蓝牙连接设备 3 |

| 按键说明 | |
|------|-------------|
| Sat+ | 饱和度+ |
| Sat- | 饱和度- |
| 2.4G | 2.4 GHz连接设备 |
| Batt | 电池电量 |
| NKRO | 全键无冲 |

充电

将电线插入USB端口，将另一端插入键盘的端口。

电源指示灯：充电时，红色电池指示灯常亮；在约5小时内完全充电，指示灯绿色长亮。

*Keychron Q1 HE键盘与所有USB端口兼容。要获得最佳信号和最快充电时间，建议采用USB3.0端口或5V-1A电源适配器。

*Keychron Q1 HE可在2.4 GHz/有线/蓝牙模式下充电。

*有线模式下，充电指示灯不会熄灭。

*本产品最高支持5V充电电压，和1A充电电流。因不当充电而产生的问题，我们概不负责。

背光灯

- 短按组合键“fn+tab”或“fn+旋钮(按压)”可关闭/开启键盘背光。

- 短按组合键“fn+Q”/“fn+A”可切换背光效果。

2.4 GHz / 蓝牙 / 有线模式

2.4 GHz模式

1. 将键盘2.4 GHz接收器连接至设备端口的USB接口

2. 将键盘“模式切换”拨动到“G”位置(2.4 GHz模式)，键盘将自动连接到您的设备。

*长按“fn+4”组合键4秒可以对键盘进行强制配对。配对过程中建议键盘和接收器的距离不超过20cm。

有线模式

1. 将键盘“模式切换”拨动到 Cable 位置（没插USB线的时候键盘无任何反应）。

2. 使用本产品USB Type-C线连接电脑即可使用。

3. 键盘背光灯将打开。

*在有线模式下，键盘不会自动进入省电模式。

蓝牙模式

1. 将键盘“模式切换”拨动到 BT 位置。
2. 键盘背光灯将打开。
3. 长按“fn+1”键4秒激活蓝牙配对(蓝牙指示灯闪烁3分钟)。
4. 在你的装置上搜索蓝牙装置“Keychron Q1 HE”并连接它(配对成功后蓝牙指示灯熄灭)。

注意:此键盘支持通过组合键“fn+1”/“fn+2”/“fn+3”依次配对最多3台设备。

*因蓝牙版本较多等原因,初次连接可能出现连接缓慢或连接失败等问题,请耐心等待检查设备设置是否正确。

切换至蓝牙装置

短按组合键“fn+1”/“fn+2”/“fn+3”切换到其他装置。

*切换过程可能会因切换频繁或切换速度过快,导致延迟,此时请耐心等待或重新切换。

回连

1. 将键盘切换到Bluetooth位置启动键盘。
2. 蓝牙指示灯快闪4秒,自动配对上一次配对的设备。
3. 如蓝牙指示灯熄灭,可按任何按键再次进入回连状态。

*键盘必须曾经配对该装置才能实现此功能。

关闭键盘

将模式开关拨动到Cable,拔掉电源线,此时键盘关闭所有模式。

自动休眠模式

键盘在蓝牙或者2.4G无线模式下,无按键操作时会进入自动休眠模式来节约电量。

1. 无按键操作10分钟后,键盘背光关闭。按任意键唤醒键盘;
2. 无按键操作30分钟后,键盘将进入深度休眠模式,同时断开无线连接。按空格键唤醒键盘,键盘背光开启,并自动回连上您的设备。

系统切换

1 — MacOS / iOS

连接到Mac或iOS操作系统时, 请将键盘上方系统开关拨至Mac/iOS。

2 — WINDOWS / 安卓

当键盘连接到 Windows 或 Android 操作系统时, 请将键盘上方系统开关拨至Win/Android。

注:由于Windows/安卓OS的兼容性、版本、品牌和驱动程序,某些多媒体键的功能可能不能被使用。我们还建议不要频繁切换操作系统,因为它可能会影响键盘的操作。

疑难排解

我无法将键盘与我的设备配对。

答: 确认您要配对的设备可使用蓝牙。

重新启动设备并尝试再次与键盘配对。

注意: 在Windows计算机上, 新的蓝牙连接有时需要额外的软件更新 - 在出现表示成功完成的消息后, 该过程可能仍在进行中。配对后至少等待20分钟, 以确保在重新启动计算机之前完成所有更新。

确认设备配置可接受蓝牙连接(Windows)并支持外部键盘(HID配置文件)。

转到蓝牙装置>打开设置, 然后选择以下复选框:

允许蓝牙设备找到这台电脑

允许蓝牙设备连接到这台电脑

当蓝牙设备想要连接时提醒我

无法使用蓝牙

答: 请打开您的电脑/智能手机上的蓝牙设置>选择键盘并删除此设备/取消配对, 然后重启您的设备; 关闭并重新打开键盘, 然后重新连接到您的设备。

2.4 GHz / 蓝牙连接或在10米内受干扰。

答：检查键盘是否放在可能干扰无线信号的金属表面上。

第三方输入工具与键盘不兼容

答：由于Windows / Android 系统的兼容性、版本、品牌和驱动程序，第三方输入工具在使用键盘时或被影响。请确保你的作业系统和驱动程序为最新版本。

某些多媒体键或功能键在设备上不起作用。

答：由于设备的兼容性，系统版本，驱动程序等原因，某些多媒体键或者功能键可能无法使用。

*多媒体键：

功能键：

安全预防措施：

防止儿童接触到产品、附件和包装部件，以防止任何意外和窒息的危险。

保持产品干燥，避免腐蚀。

不要将产品暴露在低于-10°C (14°F) 或高于50°C (122°F)的极端温度下，以保持键盘的寿命。

Keychron, Inc.

Dover, DE 19901, United States


<https://www.keychron.com>

通过以下方式与我们联系

Support@keychron.com

 @keychron

 @keychron

 @keychronMK

Keychron设计

中国制造

中国区总代：渴创技术（深圳）有限公司

执行标准：GB/T 14081-2010

售后热线：400-0766268

地 址：深圳市龙岗区坂田街道大发埔社区
大发路24号文坑工业区2栋201