
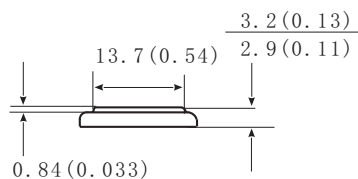


LITHIUM BUTTON CELL

Document Title: Pb041632

CR 1632



Unit: mm(inch)

Chemical System : Lithium/Manganese Dioxide

IEC Name: CR1632

Camelion Model: CR1632

Average Weight : 2.0g

Dimension (Ø x H) : $16.0^{+0.3}_{-0.1}$ x $3.2^{+0.3}_{-0.1}$ mm
 $0.63^{+0.01}_{-0.01}$ x $0.13^{+0.01}_{-0.01}$ inch

Terminals: Flat

Nominal Voltage : 3.0Volts

Capacity : 120mAh

(20±2℃, under 15kΩ load to 2.00V)

Standard Discharge Current: 0.1mA

Max. Continuous Discharge Current: 0.3mA

Max. Pulse Discharge Current: 2.5mA

Operating Temperature: -20℃- 60℃


Storage Conditions

Temperature: 0℃-30℃


Relative Humidity: 60±15%

Cross Reference: E-CR1632 (Energizer),
DL1632 (Duracell), KECR1632 (Rayovac)

Discharge characteristics

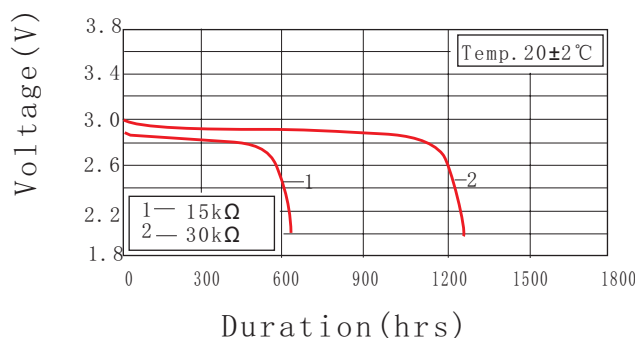

Temperature Characteristics

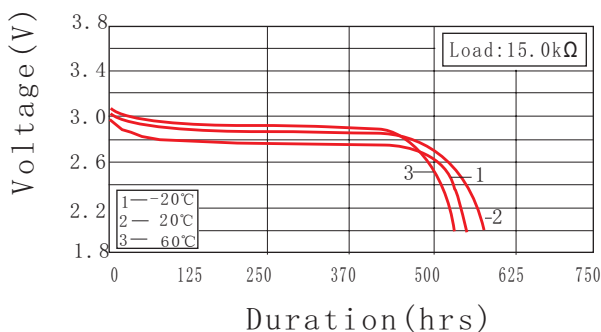

Notice:

Environmental elements comply with RoHS requirements. This information is subject to change without prior notice and for reference only. It should not be used as a basis for a product guarantee or warranty. For additional information, please consult your nearest Camelion Sales Office or Distributor or visit our website at: www.camelionbattery.com.