




STEP 1:

Screw Pillar Installation

Install the four TR4 screws pillars on AMD TR4 processor socket.

Required mounting parts:

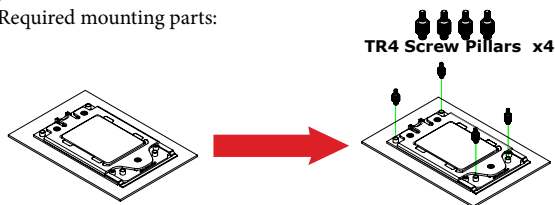


STEP 2:

TR4-S Mounting Kits Installation

Place the TR4-S mounting kits on the screw pillars, and then screw the four Screw Nuts on TR4 mounting kit and ensure they are parallel to socket and each other.

Required mounting parts:

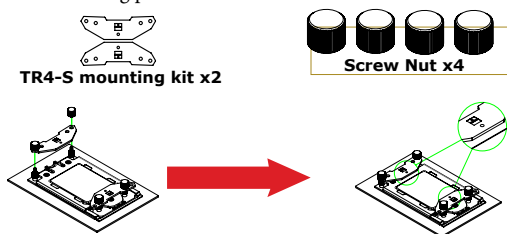


STEP 3:

Applying thermal paste

If there are residual traces of thermal paste on your CPU, please clean them off first.

Then press 9 small drops (4-6mm diameter) of Archon TR4 onto the the heatspreader in a TR4 pattern as shown below:


Continue by adding 4 more drops (5-6mm diameter) of Silver Arrow TR4 in a square pattern at the center as shown below:

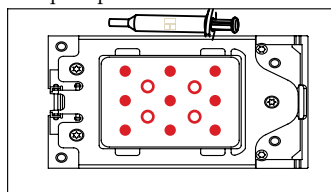

Caution: Applying too much thermal paste will lower heat conductivity

STEP 4:


Attaching the 4 pieces Anti-Vibration Pads and fan clips

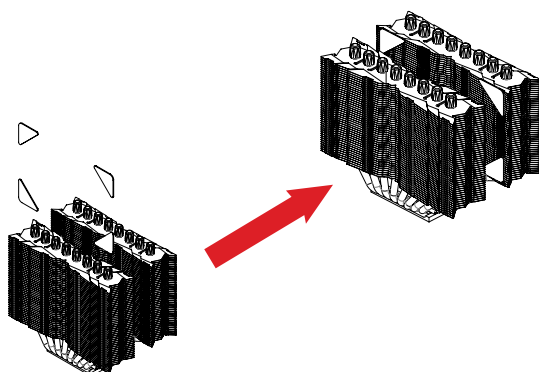

STEP 5:

Attaching cooler crossbar to mount with M3L7 screws

Required mounting parts:

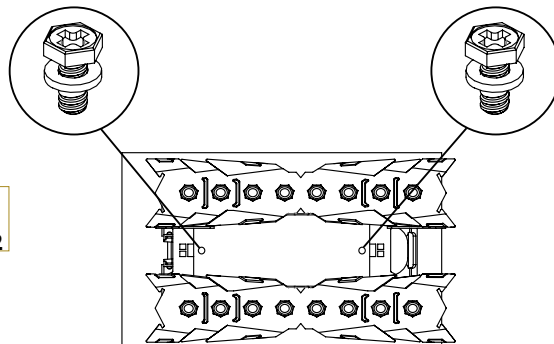


Caution: Gently tighten the screws until they stop, but don't use excessive force (max. torque 0.6 Nm).


STEP 6:

Attaching TY-143 fan and fan clips

Fan clips install start from the bottom to the top

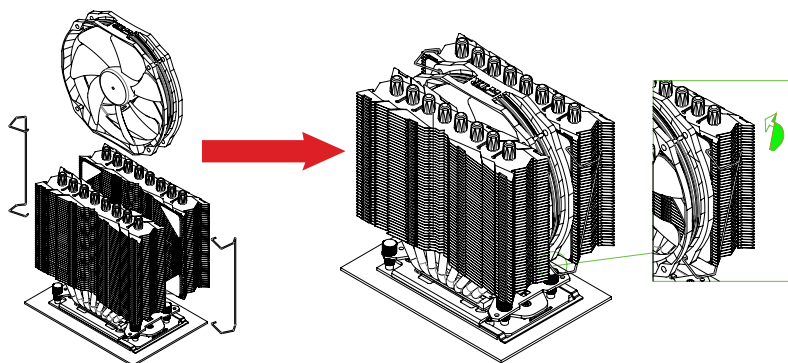


Required mounting parts:

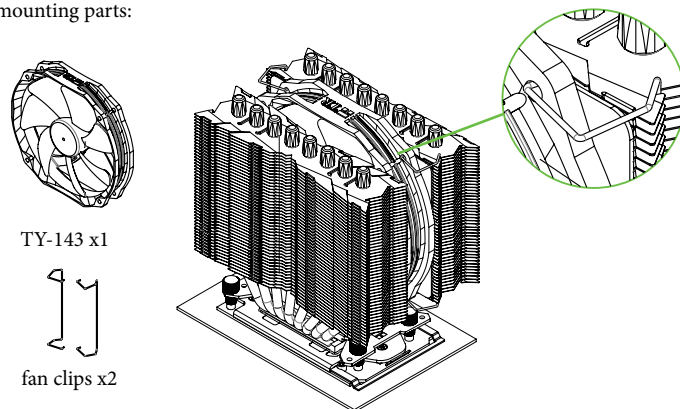

Extra fan clips step:

"Caution, right and left fan clips are not the same! When facing the front of cooler the right side fan clip is labeled with red and left side fan clip is labeled with white. All white labeled left side fan clips go on the left side of cooler and all red labeled right side fan clips go on the right side of cooler including the optional rear fan."


Required mounting parts:

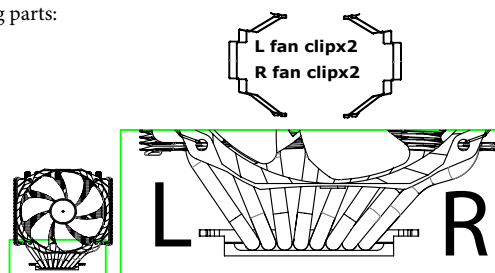



Assembly Package



M3L7 screws x3


Screw Nut x4


TR4 screws x4





TR4-S mounting kit x2


Anti-Vibration Padx12


L fan clipsx2


fan clipsx2


R fan clipsx2

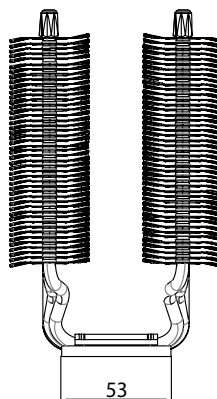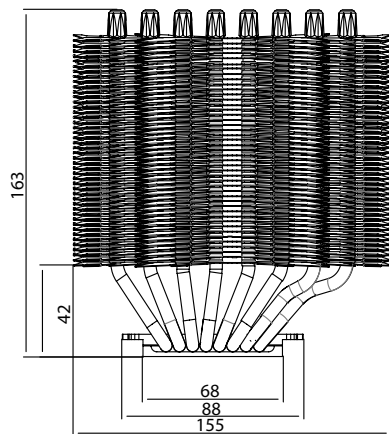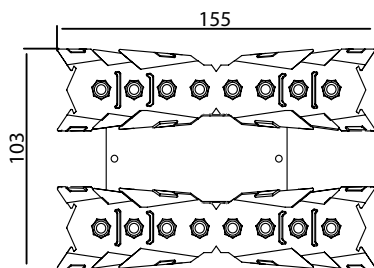

Technical Spec :

Heatsink Specifications:

Dimension: L155 mm x W103 mm x H163 mm
Weight: 880g
Heatpipe: 6mm heatpipes*8 units
Copper Base: C1100 Pure copper nickel plated

Fan Specification:

Dimension: L152mm x H140mm x W26.5mm
Weight: 170g
Fan speed: 600~2500RPM
Fan noise: 21~ 45dBA(Test distance 1.0M)
Airflow: 31.4~130 CFM
Connector: 4 Pin (PWM Fan connector)

Thermal design power: 320watt

The Ultimate Cooling Solutions!

Thermalright Produkte werden in
Europa importiert und vertrieben
durch die:
PC-Cooling GmbH
Eichenallee 3
24589 Nortorf

 **Thermalright**
www.thermalright.com
TEL: +886-2-2915-5005
FAX: +886-2-2915-5123
EMAIL: sales@thermalright.com